



ELECTRICAL & MECHANICAL SPECIFICATION

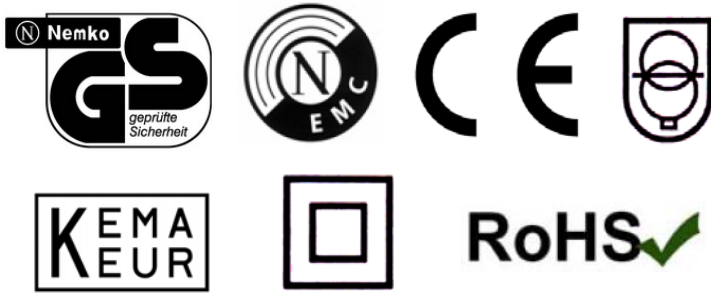

ELECTRONICAL SPECIFICATION

Input Voltage	230	Vac
Frequency (Hz)	50	Hz
Power Rated (W)	10	VA
Exciting Current With No load	30	mA Max
Exciting Current With Full load	50	mA Max
Output Voltage	12.0	Vac ±5%
Output Current	400	mA
Output Voltage Without Load	14.0	Vac±5%
HI-POT :		
Test Time	1	Min
PRI TO SEC	3750	Volts
PRI TO CORE	3750	Volts
SEC TO CORE	1250	Volts
Efficiency	52	%
Insulation Class	B (130)	°C
protection index	IP20	

Dimension Drawings

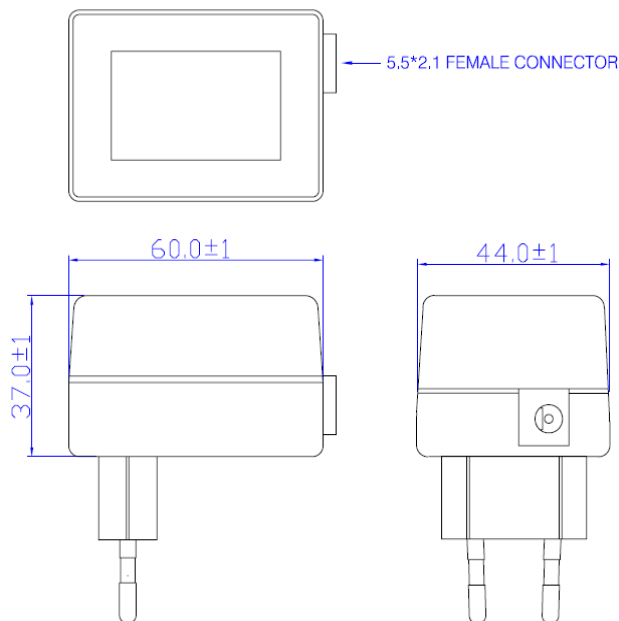

Input Cable: **EUROPE PLUG IN**

Output Cable: **5.5*2.1 FEMALE CONNECTOR**

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	66.0*44.0*37.0	mm
Weight	210	g
<i>Environment:</i>		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Humidity	0 To 90	%RH

ELECTRICAL CIRCUIT

